




KY TYPE 208

Double Mechanical Seals

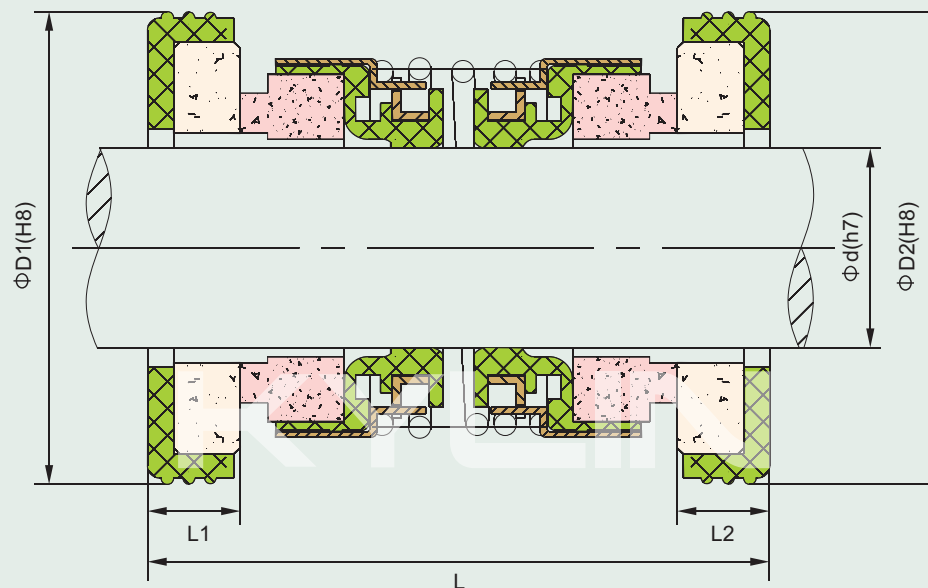

| Part# | d | D1 | D2 | L | L1 | L2 |
|----------------|----|----|----|----|----|----|
| KY TYPE 208-10 | 10 | 21 | 21 | 30 | 5 | 5 |
| KY TYPE 208-12 | 12 | 26 | 26 | 30 | 5 | 5 |
| KY TYPE 208-14 | 14 | 26 | 26 | 38 | 5 | 5 |
| KY TYPE 208-16 | 16 | 27 | 27 | 38 | 5 | 5 |
| KY TYPE 208-18 | 18 | 33 | 33 | 38 | 5 | 5 |
| KY TYPE 208-20 | 20 | 35 | 35 | 40 | 5 | 5 |
| KY TYPE 208-25 | 25 | 40 | 40 | 48 | 7 | 7 |
| KY TYPE 208-30 | 30 | 45 | 45 | 51 | 7 | 7 |
| KY TYPE 208-35 | 35 | 50 | 50 | 51 | 8 | 8 |

Combined Materials

- Stationary Ring (Ceramic/SiC/TC)
- Rotary Ring (Carbon/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts(Steel)

Working Conditions

- Pumps: Submersible pumps, sewage pumps, etc.
- Temperature: -20°C~100°C
- Pressure: $\leq 0.35\text{MPa}$
- Speed: $\leq 6\text{ m/Sec}$